



daisy.

A guide to...

Technicolor TG589/TG588.

Changing Wireless Channel


we are **daisy.**

www.daisygroup.com


Please note: We advise running through this configuration using a Windows based PC/laptop with a Ethernet connection to the router. If you are using any other operating system or connecting via wireless then settings may not save correctly.

If you got a block of public IP addresses from Daisy then they will need to be configured on your router. We are going to run through doing this today.

Open a web browser and enter 192.168.1.1 in the address bar.

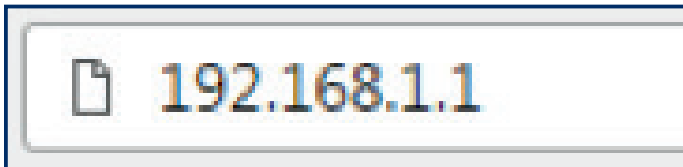

This should then bring up the Technicolor page, you will need to click "Sign in" in the top right.

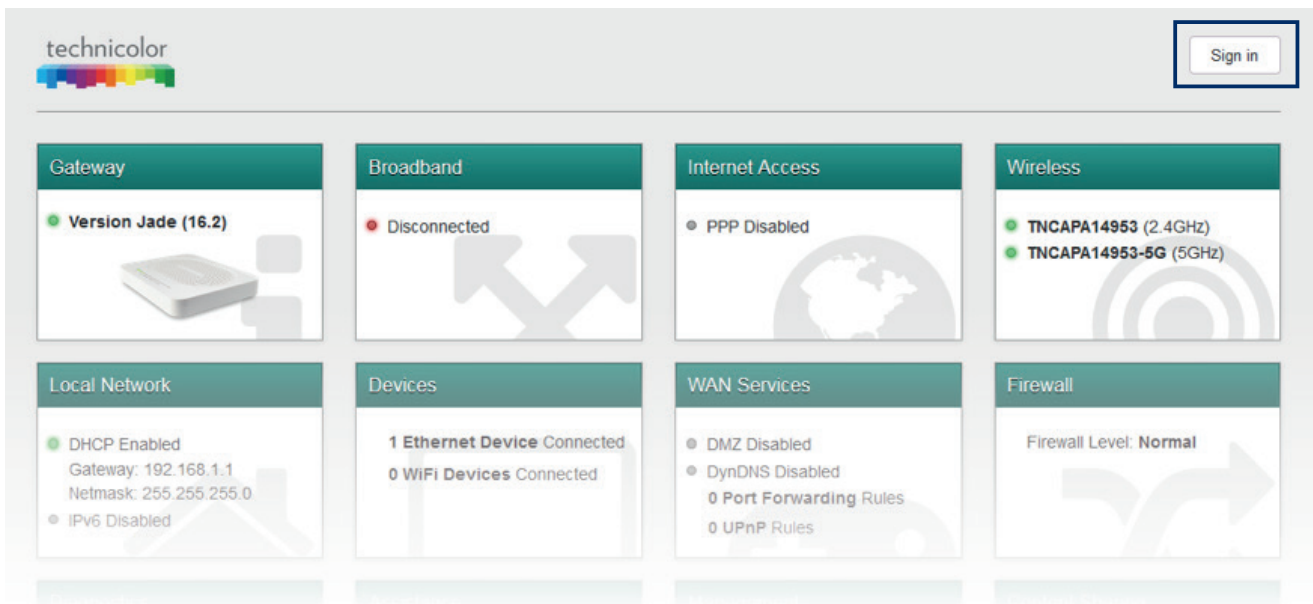


You should then see the following sign in screen below.

You will need to login using the below details.

Username: admin

Password: serial number of the router (this is on the bottom of the router and starts with CP)

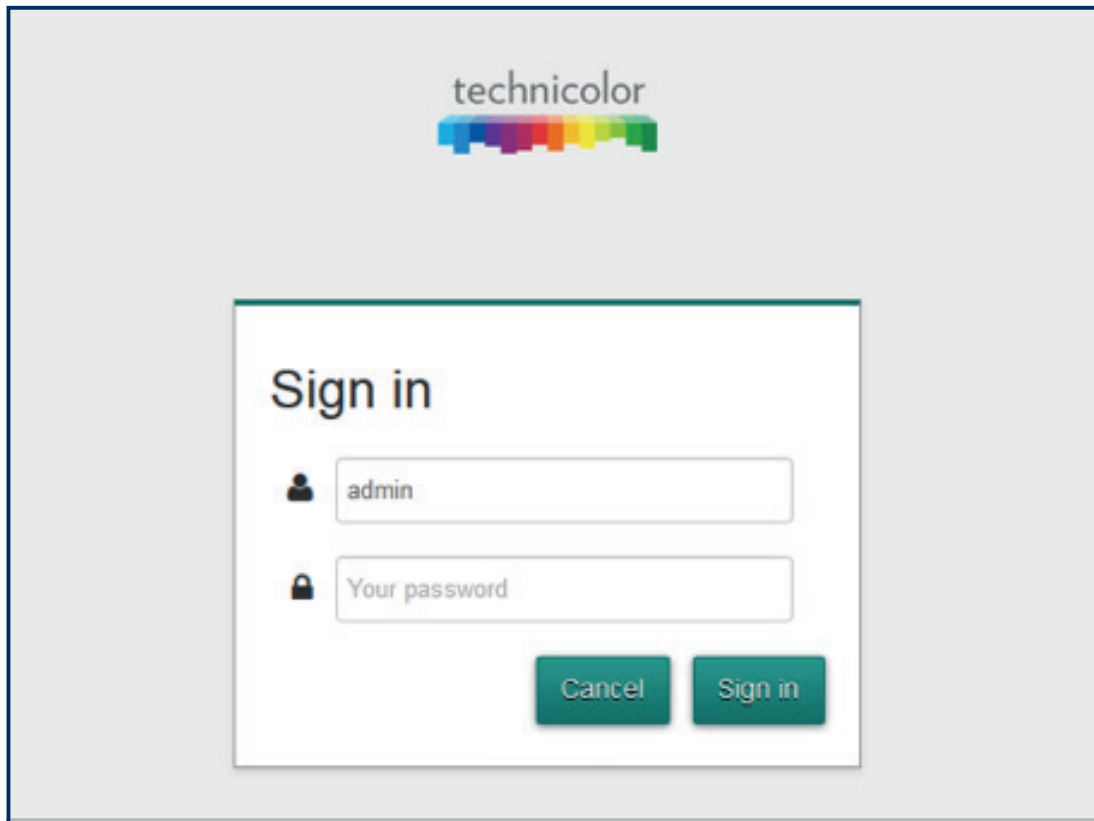

The image shows a screenshot of a web-based sign-in interface for Technicolor. At the top center, the word "technicolor" is displayed in a grey, lowercase sans-serif font, with a horizontal bar of multi-colored rectangular segments (blue, purple, red, orange, yellow, green) positioned directly below it. Below the logo is a white rectangular sign-in form with a thin grey border. The form contains the text "Sign in" in a large, bold, black font. Underneath, there are two input fields: the first is preceded by a black person icon and contains the text "admin"; the second is preceded by a black padlock icon and contains the text "Your password". At the bottom right of the form are two green rectangular buttons with white text: "Cancel" and "Sign in".

Wireless show advanced

ACCESS POINTS 2.4GHZ
TNCAPA14953
 GuestA14953

ACCESS POINTS 5GHZ
TNCAPA14953-5G
 GuestA14953-5G

WIRELESS DATA
 Analyzer 2.4GHz
 Analyzer 5GHz
 Client Monitoring

Interface

Radio Enabled

Frequency band 2.4GHz

MAC address E0:B9:E5:A1:49:53

Speed 130Mbps

Channel Auto

Current channel 1

Access Point

Enabled

SSID name

Security Mode WPA+WPA2 PSK

Wireless Password

WPS

WPS AP PIN code 47602359

WPS Device PIN code Set PIN code

WPS PBC Trigger

Band Steering Enabled

Band Steering actively moves your devices to the best available radio.

Cancel Save

Once logged in click on 'Wireless'. If you have a router which supports both wireless bands you will have two Access Points on the left hand side, this is the TG589VAC. The TG588V may only have a single band, so will only show one Access Point on the left.

Use the drop down box to specify a 'Wifi Channel' you want to use, if you have two access points (2.4GHz and 5GHz) then you may need to do this on both channels. They can be selected from the left hand side of the screen.

Channels 1, 6, and 11 are the most popular channels as these do not overlap, however it may be trial and error to find the best channel for your local network.